

## Parameters

Electrical Parameters:	
Buspro power supply	12-30VDC
Buspro power consumption	30mA/DC24V
Ultrasonic sensor range in diameter	6m (Installation Height: 3m)
Range for LUX sensor	0-500lux
Environmental Conditions:	
Working temperature	-5°C~45°C
Working relative humidity	Up to 90%
Storage temperature	-20°C~+60°C
Storage relative humidity	Up to 93%
Approved	
CE	
RoHS	
Product information:	
Dimensions	63(Diameter)×38(mm)
Net weight	90.5(g)
Housing Material	Infrared lens, ABS
Installation	Ceiling mounted
Protection rating	IP20


## Important Notes

- Installation location — Indoor, please keep it away from AC outlets and heat source
- Detect targets-Only can detect moving objects with thermal radiation
- Buspro cable — HDL Buspro/KNX cable, 0.8mm Single- Core Copper cable
- Buspro connection — Series connection (hand-in-hand)
- Installation — Ceiling mounted

## HDL Buspro Cable Guide

CAT5/CAT5E	HDL Buspro	HDL Buspro/KNX
Brown/Orange	DC24V	Red
Brown white/Orange white	COM	Black
Blue white/Green white	DATA-	White
Blue/Green	DATA+	Yellow

## Ultrasonic Sensing range in diameter



## Overview




**HDL-MSPU03.4C** ceiling mounted ultrasonic Sensor includes, Ultrasonic sensor, LUX sensor, universal switch, logic block. The logic block can combine all of sensor for different application. Support HDL security command.


## Functions

- Equipped with LUX sensor, ultrasonic sensor and universal switch, which can be used as logic conditions
- With two logic relationship: OR, AND
- Adjustable ultrasonic sensitivity, Sensitivity range:1-10
- 24 logic blocks in total, each logic block has 20 output targets
- Universal Switch 201 - 248 can be used as logic inputs, two Universal Switches for each logic and they has auto-off option too (from 1 - 3600 seconds)
- A Logic can trigger some targets when it is true, and trigger other targets when it is false
- Security function, to be used with the security module
- Supports upgrade via HDL Buspro setup tool software


## Dimensions and Wiring

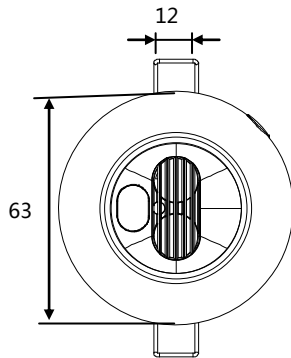


Front View



Side View

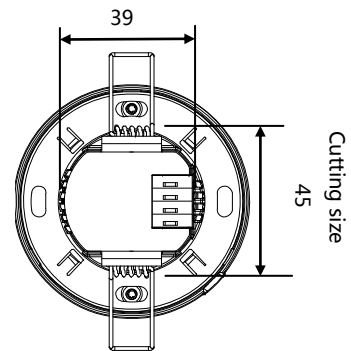


Back View



Interior Design


**Module indicator:** Keep pressing for 3 seconds, user can read and modify the address of the module in the HDL Buspro software.

**Indication :** Can set to indicate the LED or not. If yes, when detecting some movement, the LED will turn on during this process; if not, whether there is movement or not, it always keeps off.

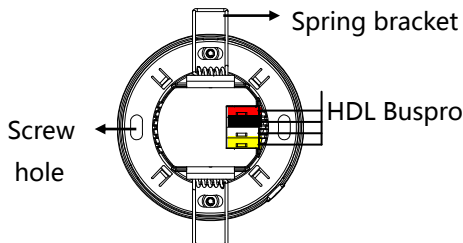

Back View

**Spring bracket installation:** it is used to install the sensor into thin ceiling, wooden boards etc, make a round hole with diameter of 45mm, then fasten it with the spring bracket.



Spring bracket installation

**Screw installation:** it is used to install the sensor into special back box, thick wall or wooden ceiling that cannot use spring bracket. You must remove the spring bracket when install the sensor by screw.

## Safety Precautions



- Do not make wrong connection on Buspro interface, it will damage the Buspro interface of this module
- Do not get AC power into Buspro wire, it will damage all of devices in the system
- Avoid contact with liquids and corrosive gases.
- Ensure good ventilation.

## Package Contents

- Datasheet \*1/ HDL-MSPU03.4C\*1/ Bus terminal \*1

